

# 5.8 GHz 40 channels AV Receiver for USB - manual




Plug and play. Just connect it and use.

Small size, 52 \* 27 mm without USB connector.

5.8GHz Bands and Channels can change with 2 push-button switches.

Name	Band	Frequency (MHz)							
		1	2	3	4	5	6	7	8
A	1	5865	5845	5825	5805	5785	5765	5745	5725
B	2	5733	5752	5771	5790	5809	5828	5847	5866
E	3	5705	5685	5665	5645	5885	5905	5925	5945
Fatshark	4	5740	5760	5780	5800	5820	5840	5860	5880
Raceband	5	5658	5695	5732	5769	5806	5843	5880	5917

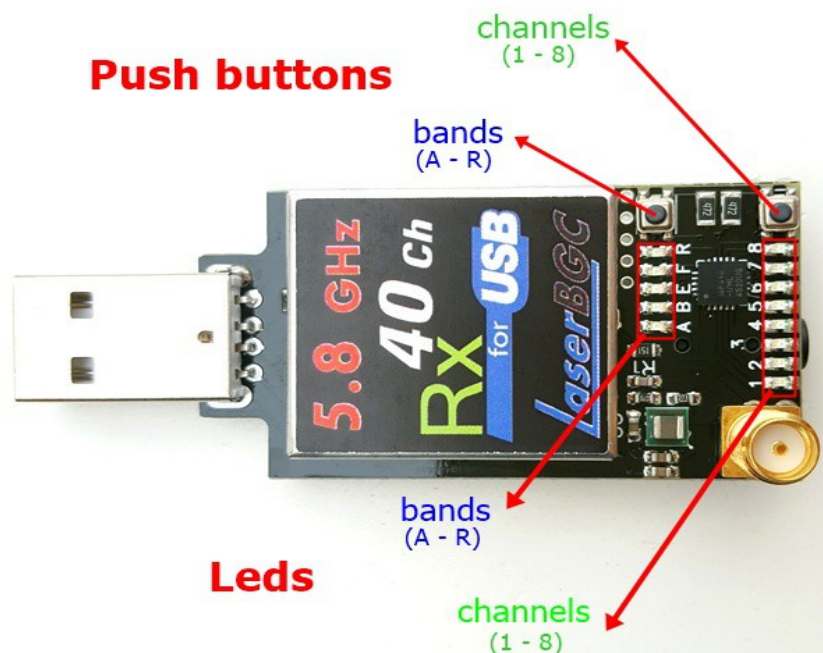

RP-SMA antenna connector.


3.5 mm headphone socket is for Audio.


6.5MHz Audio subcarrier.

## Windows 7, Windows 8, Windows 8.1, Windows 10 (32 and 64 bit)


### Program setup

- 1) Download the below program (41.3 KB) :
- 2) [http://www.watec.co.jp/English/eng\\_others/WatecCameraViewer\\_en\\_v1\\_20.zip](http://www.watec.co.jp/English/eng_others/WatecCameraViewer_en_v1_20.zip)
- 3) Unzip the program in to a new folder.
- 4) Connect USB Rx module to your computer, Wait until you install the USB device software.
- 5) "USB device software has been successfully installed" information will appear on the screen.
- 6) Run the program

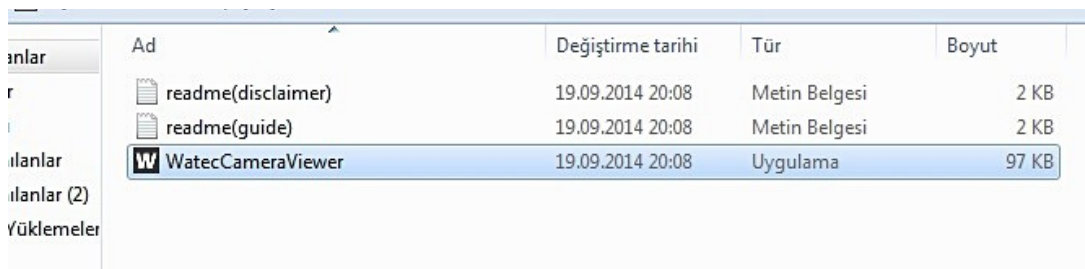


Ad	Değiştirme tarihi	Tür	Boyut
readme(disclaimer)	19.09.2014 20:08	Metin Belgesi	2 KB
readme(guide)	19.09.2014 20:08	Metin Belgesi	2 KB
 WatecCameraViewer	19.09.2014 20:08	Uygulama	97 KB

- 7) Choose USB 2.0 PC Camera from Devices

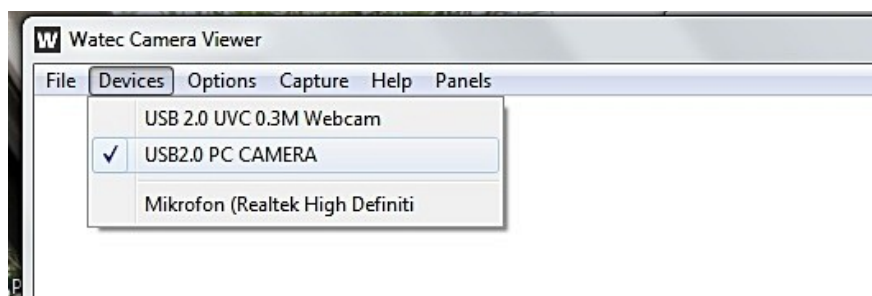

Choose Preview from Options

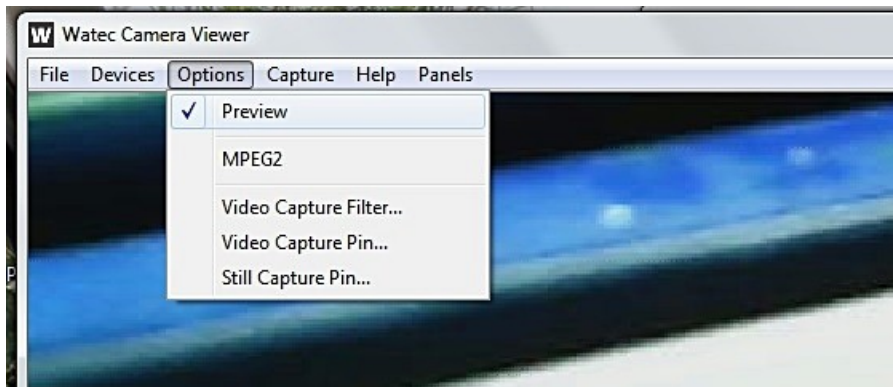

You can set the Windows as 640\*480 from Video Capture Pin.



You can adjust the color, brightness, sharpness, etc. From Video Capture Filter.

